

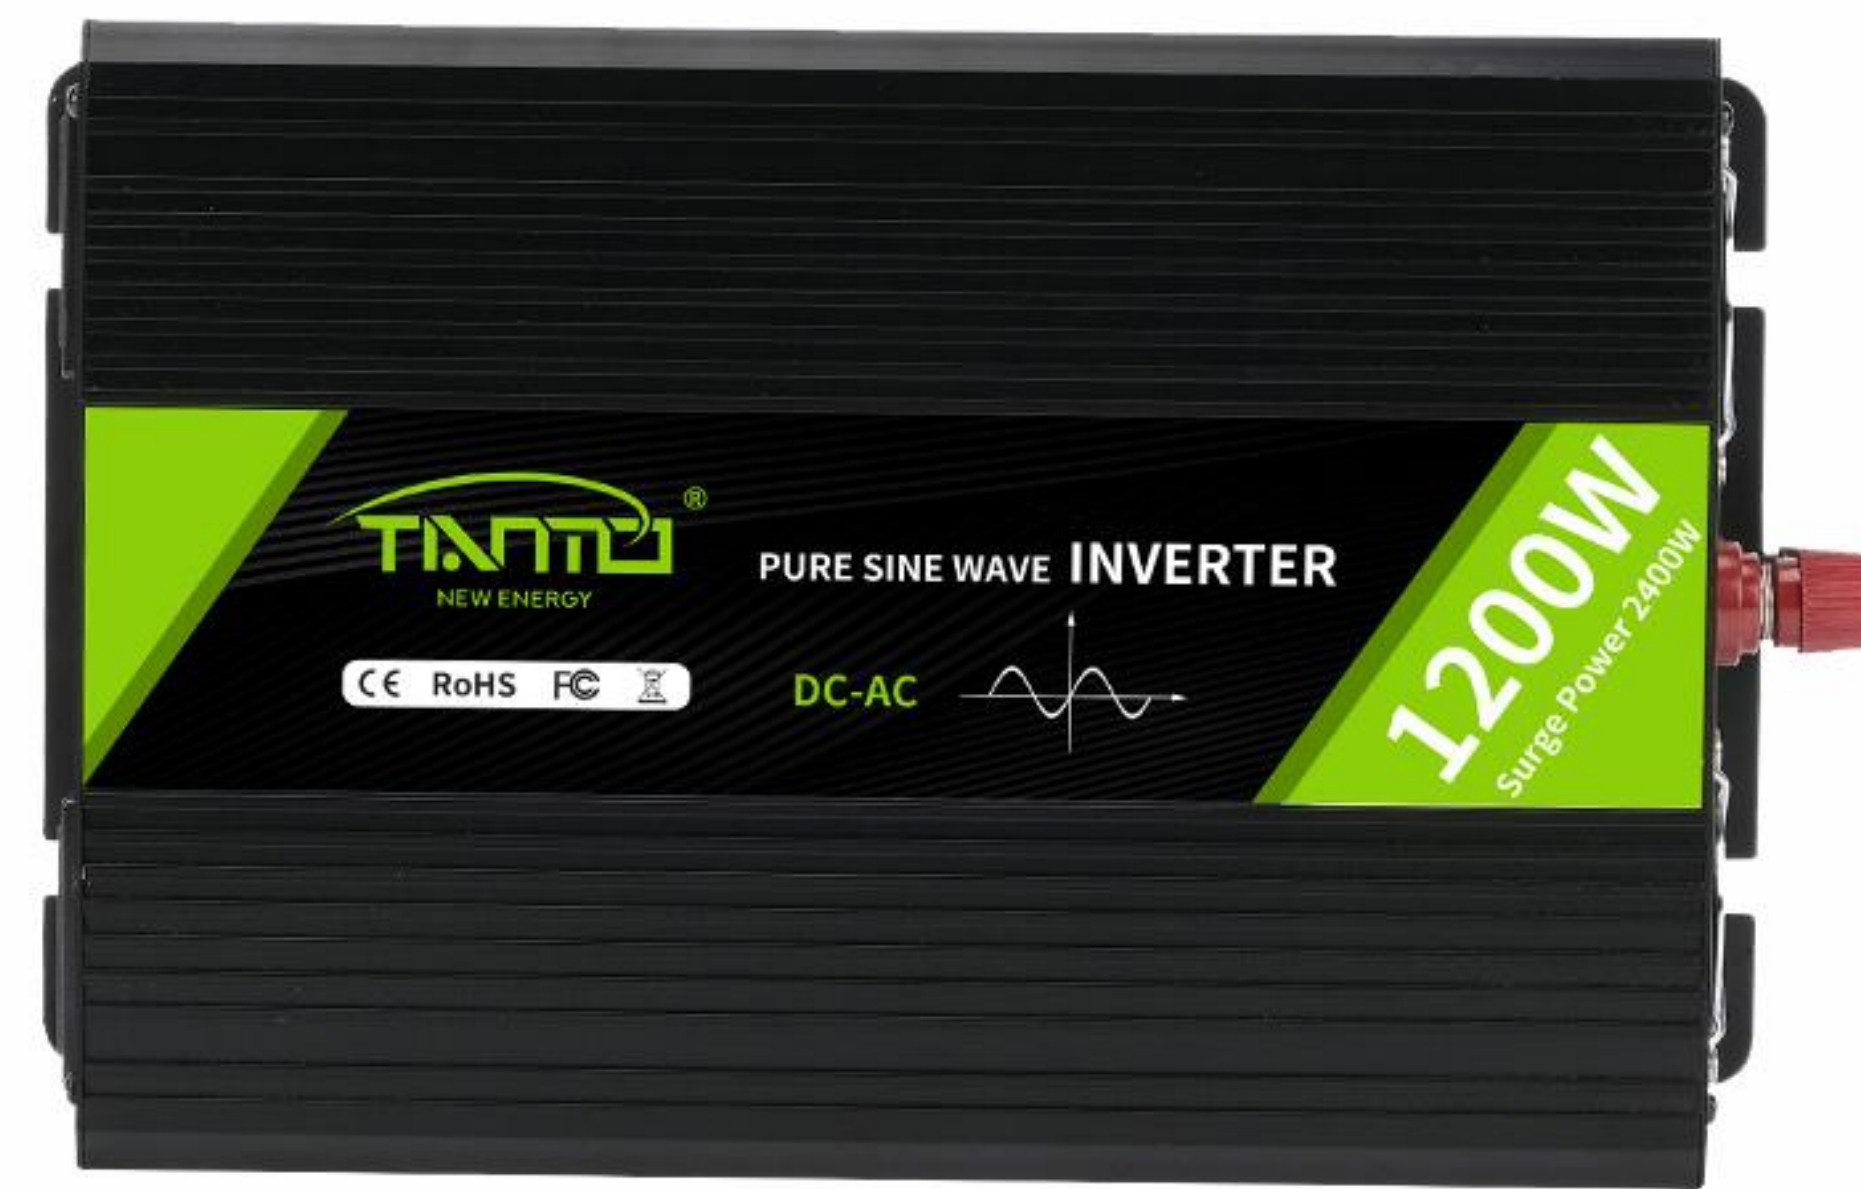


1200W




PICTURES

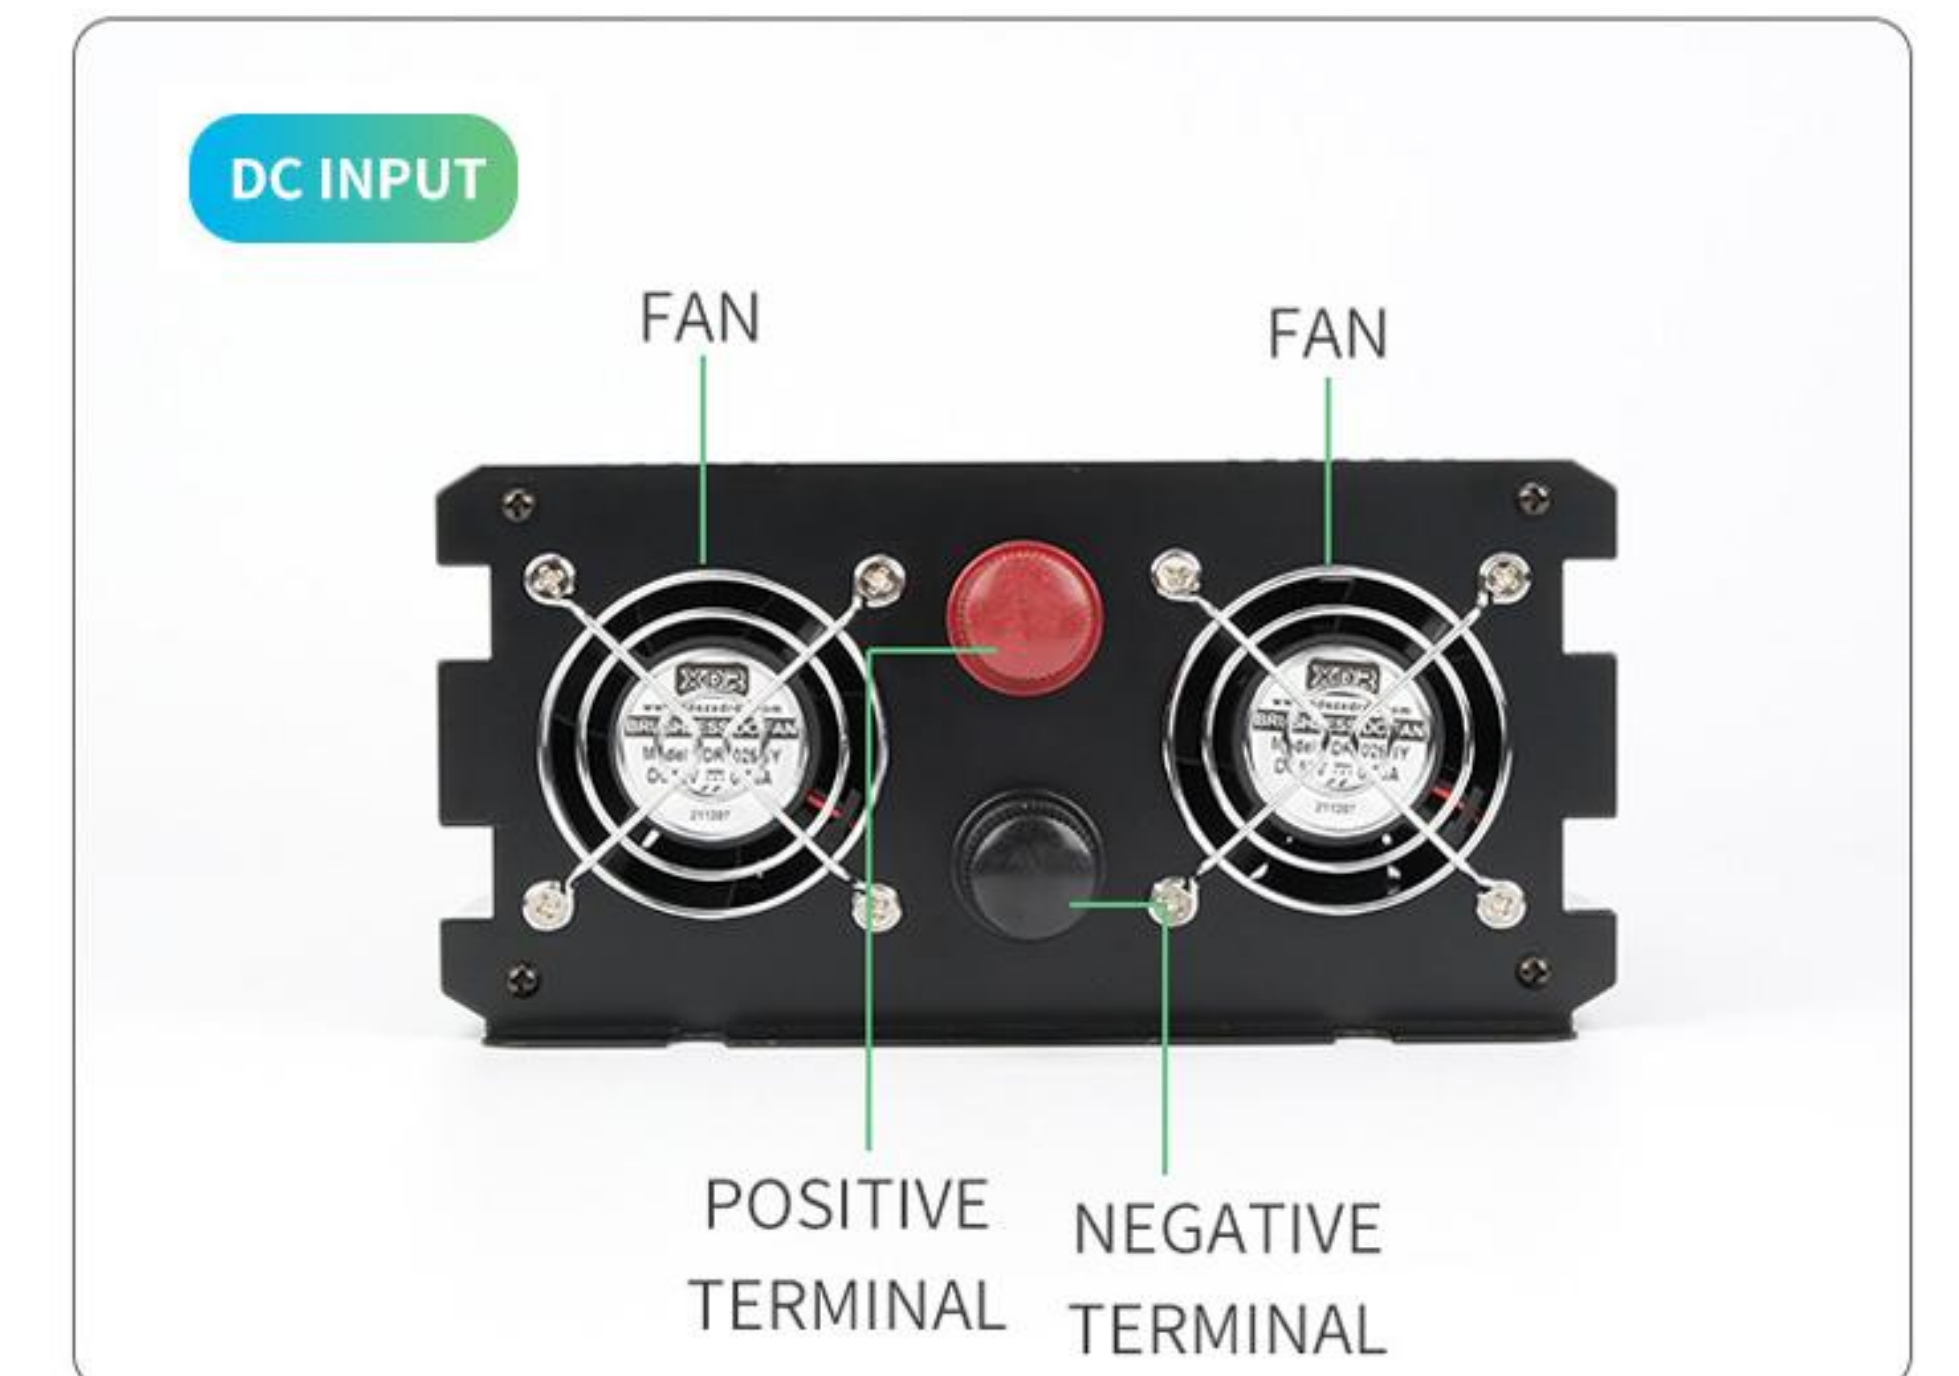

DETAILS

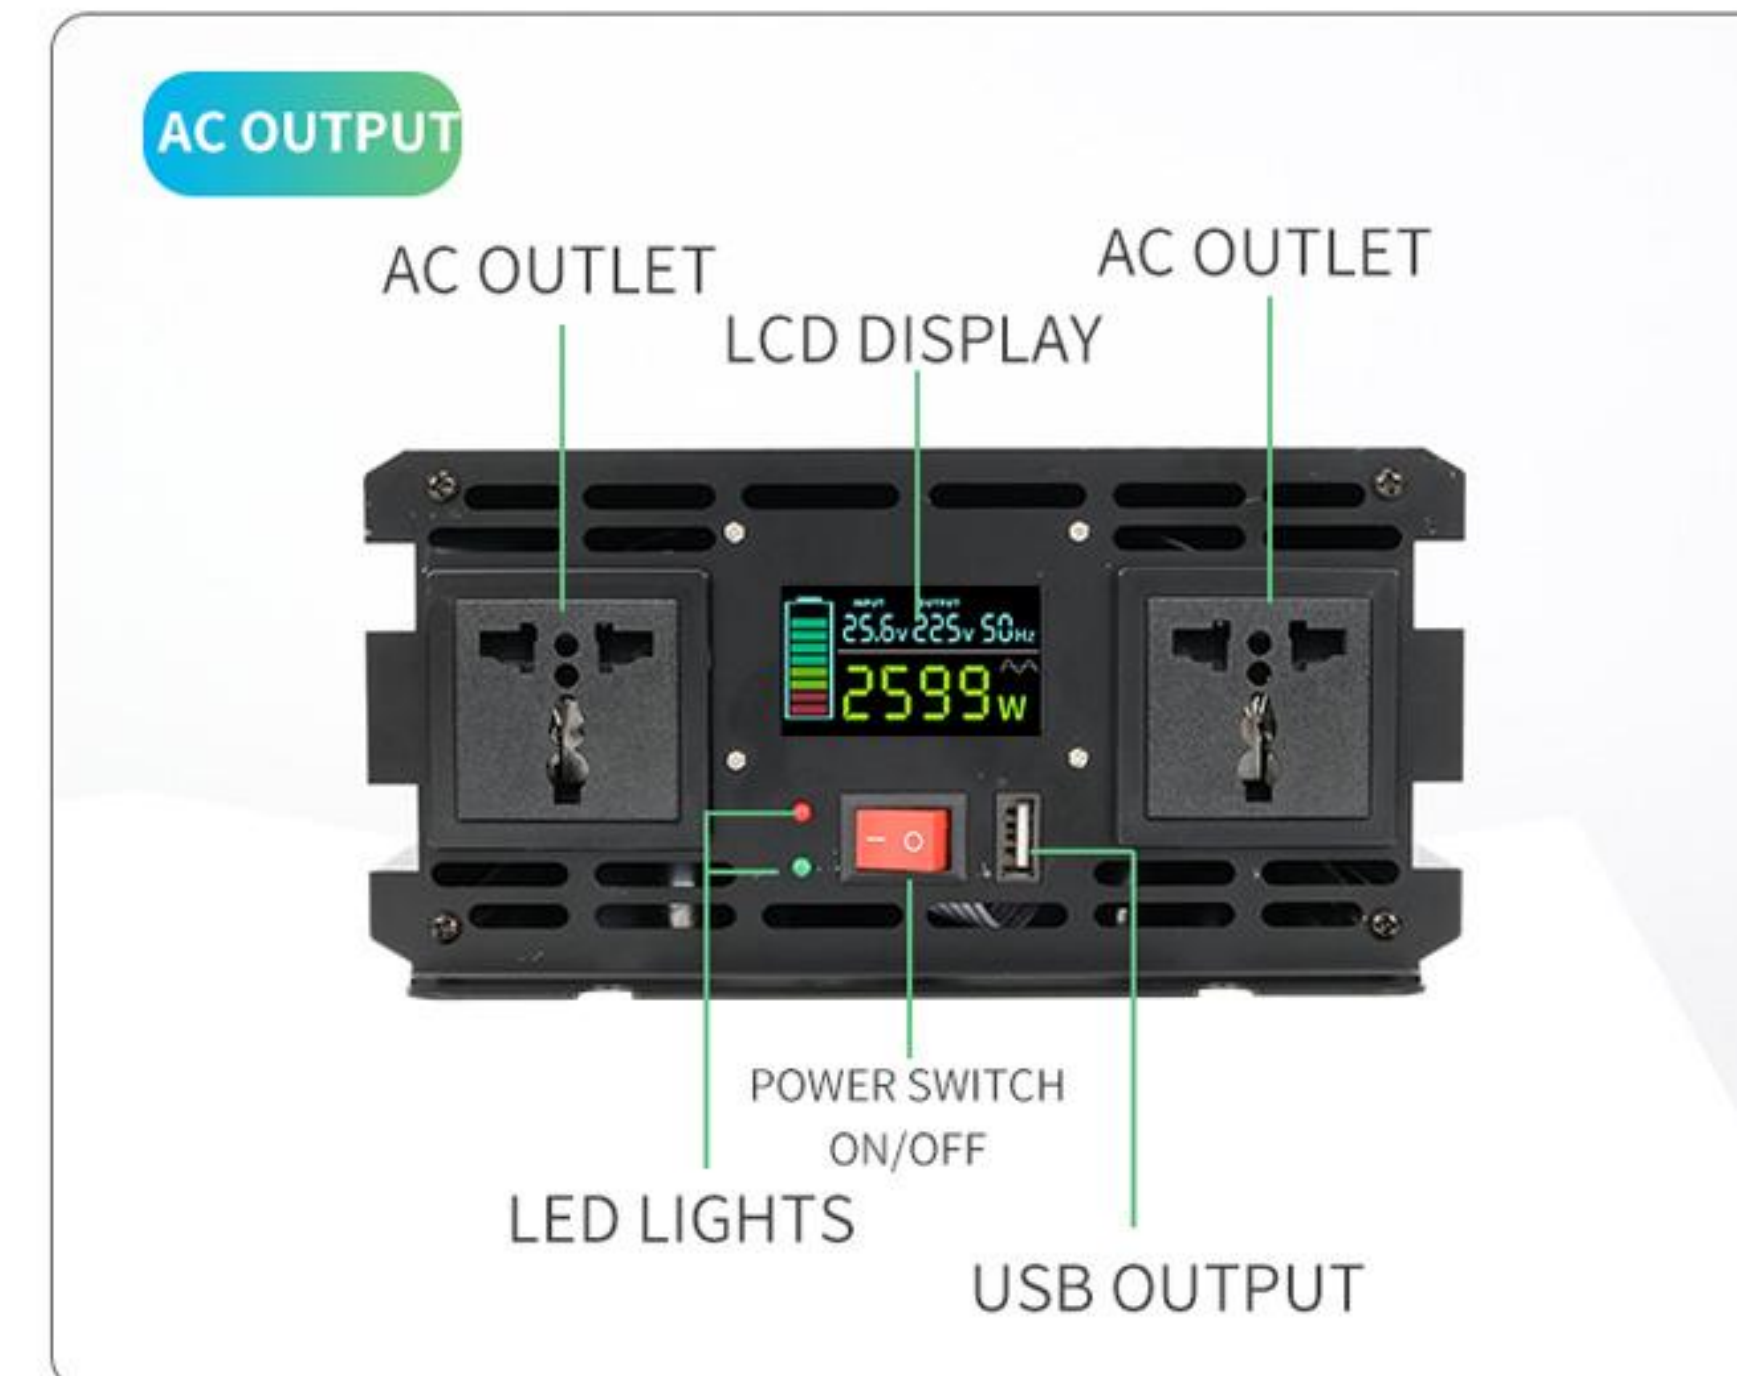

CONNECTION

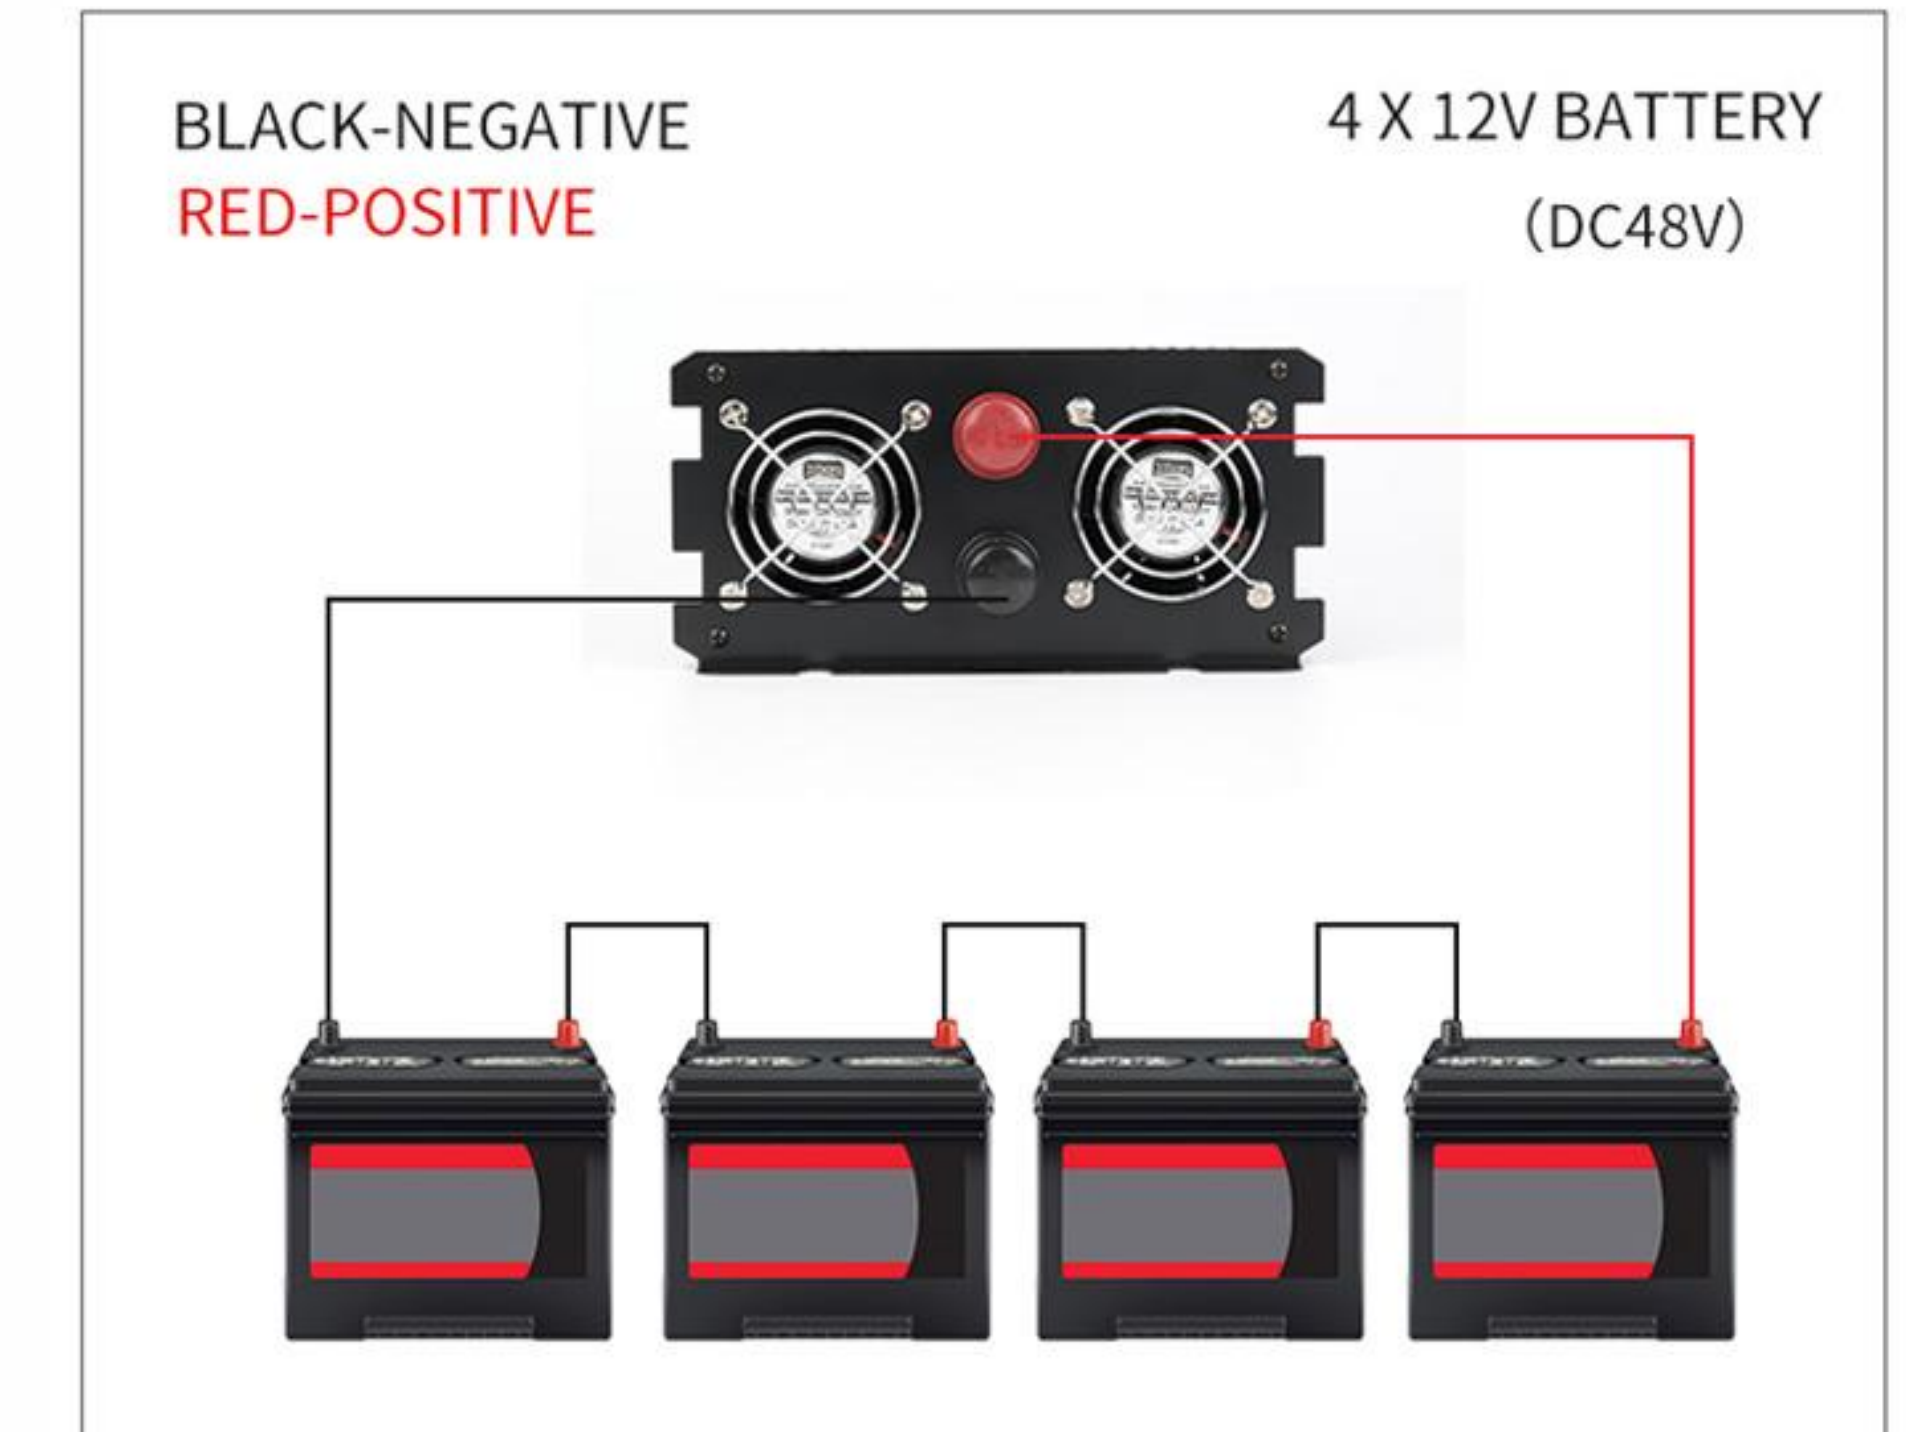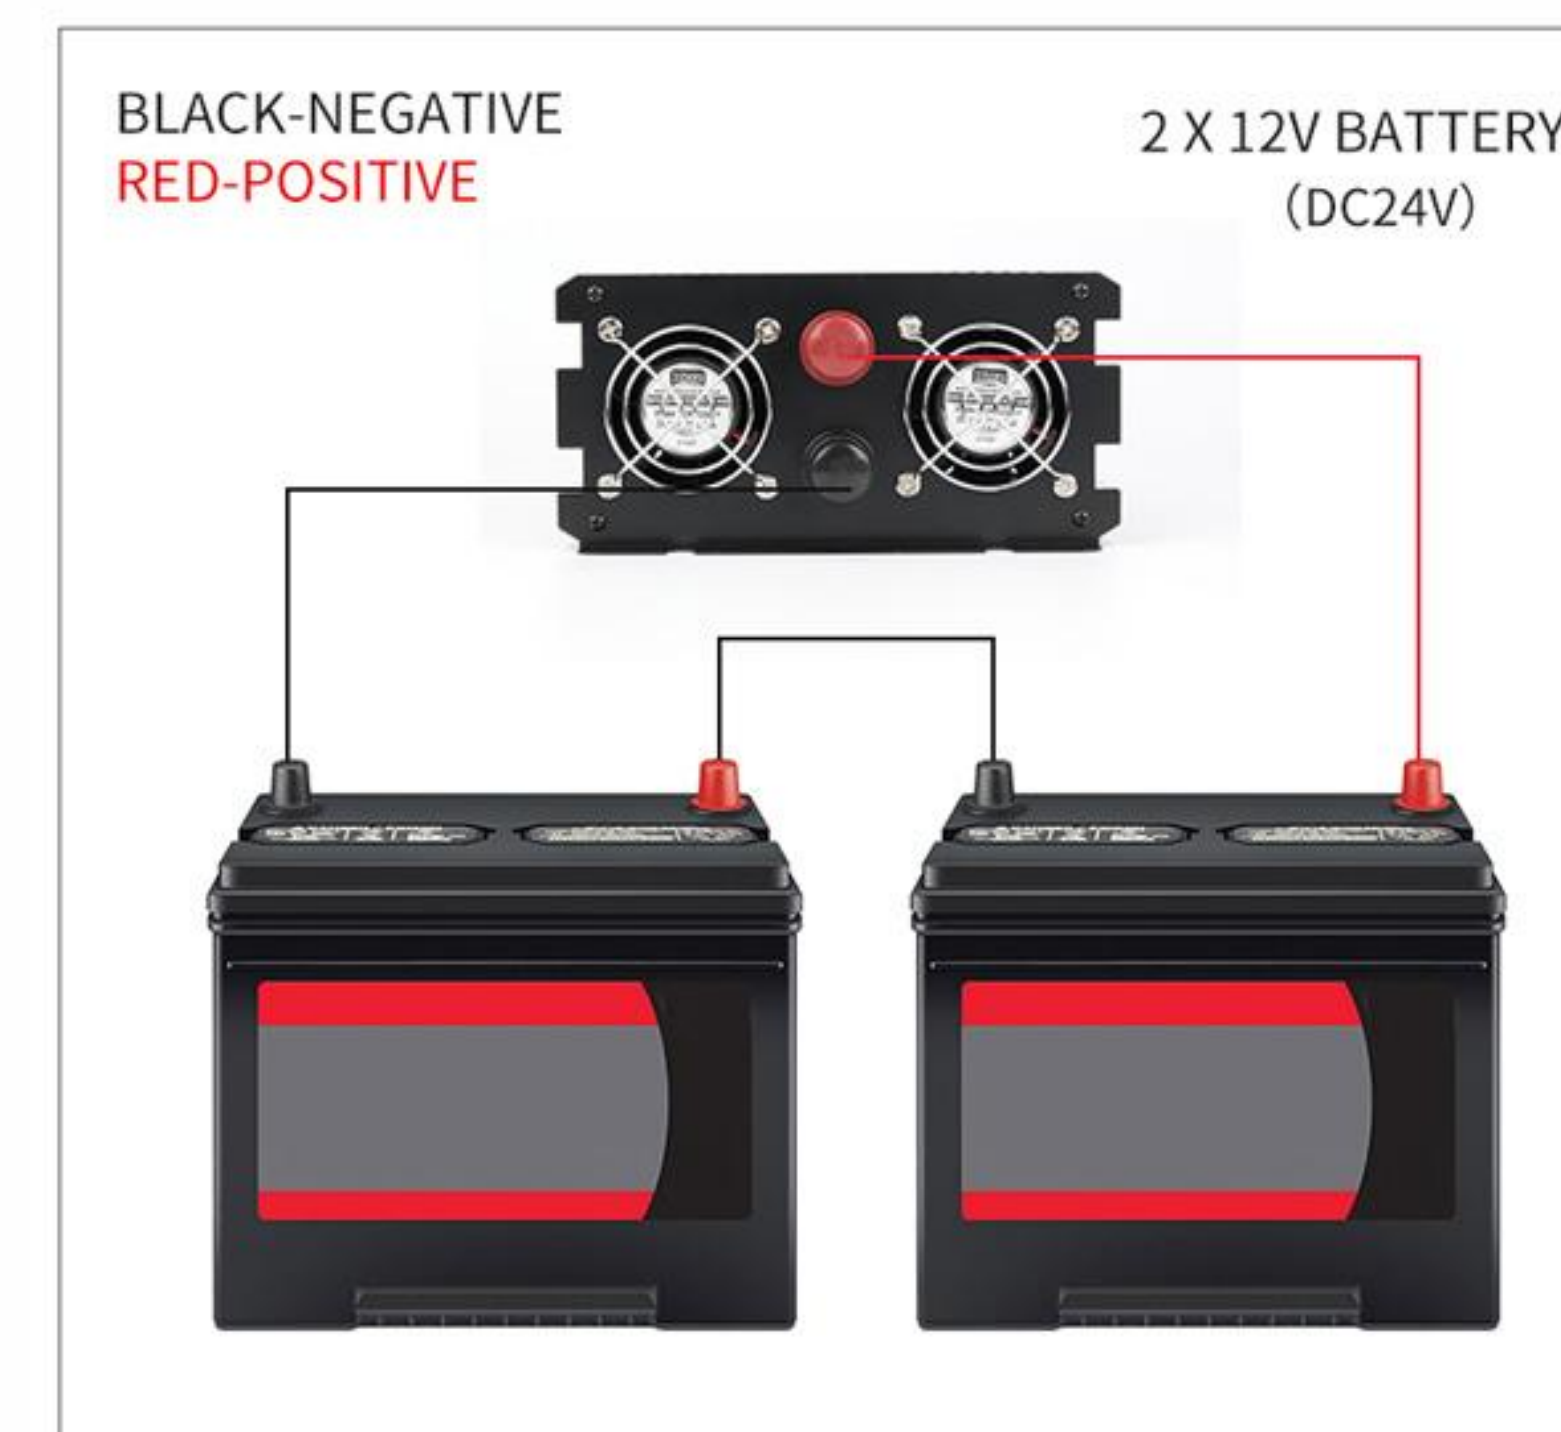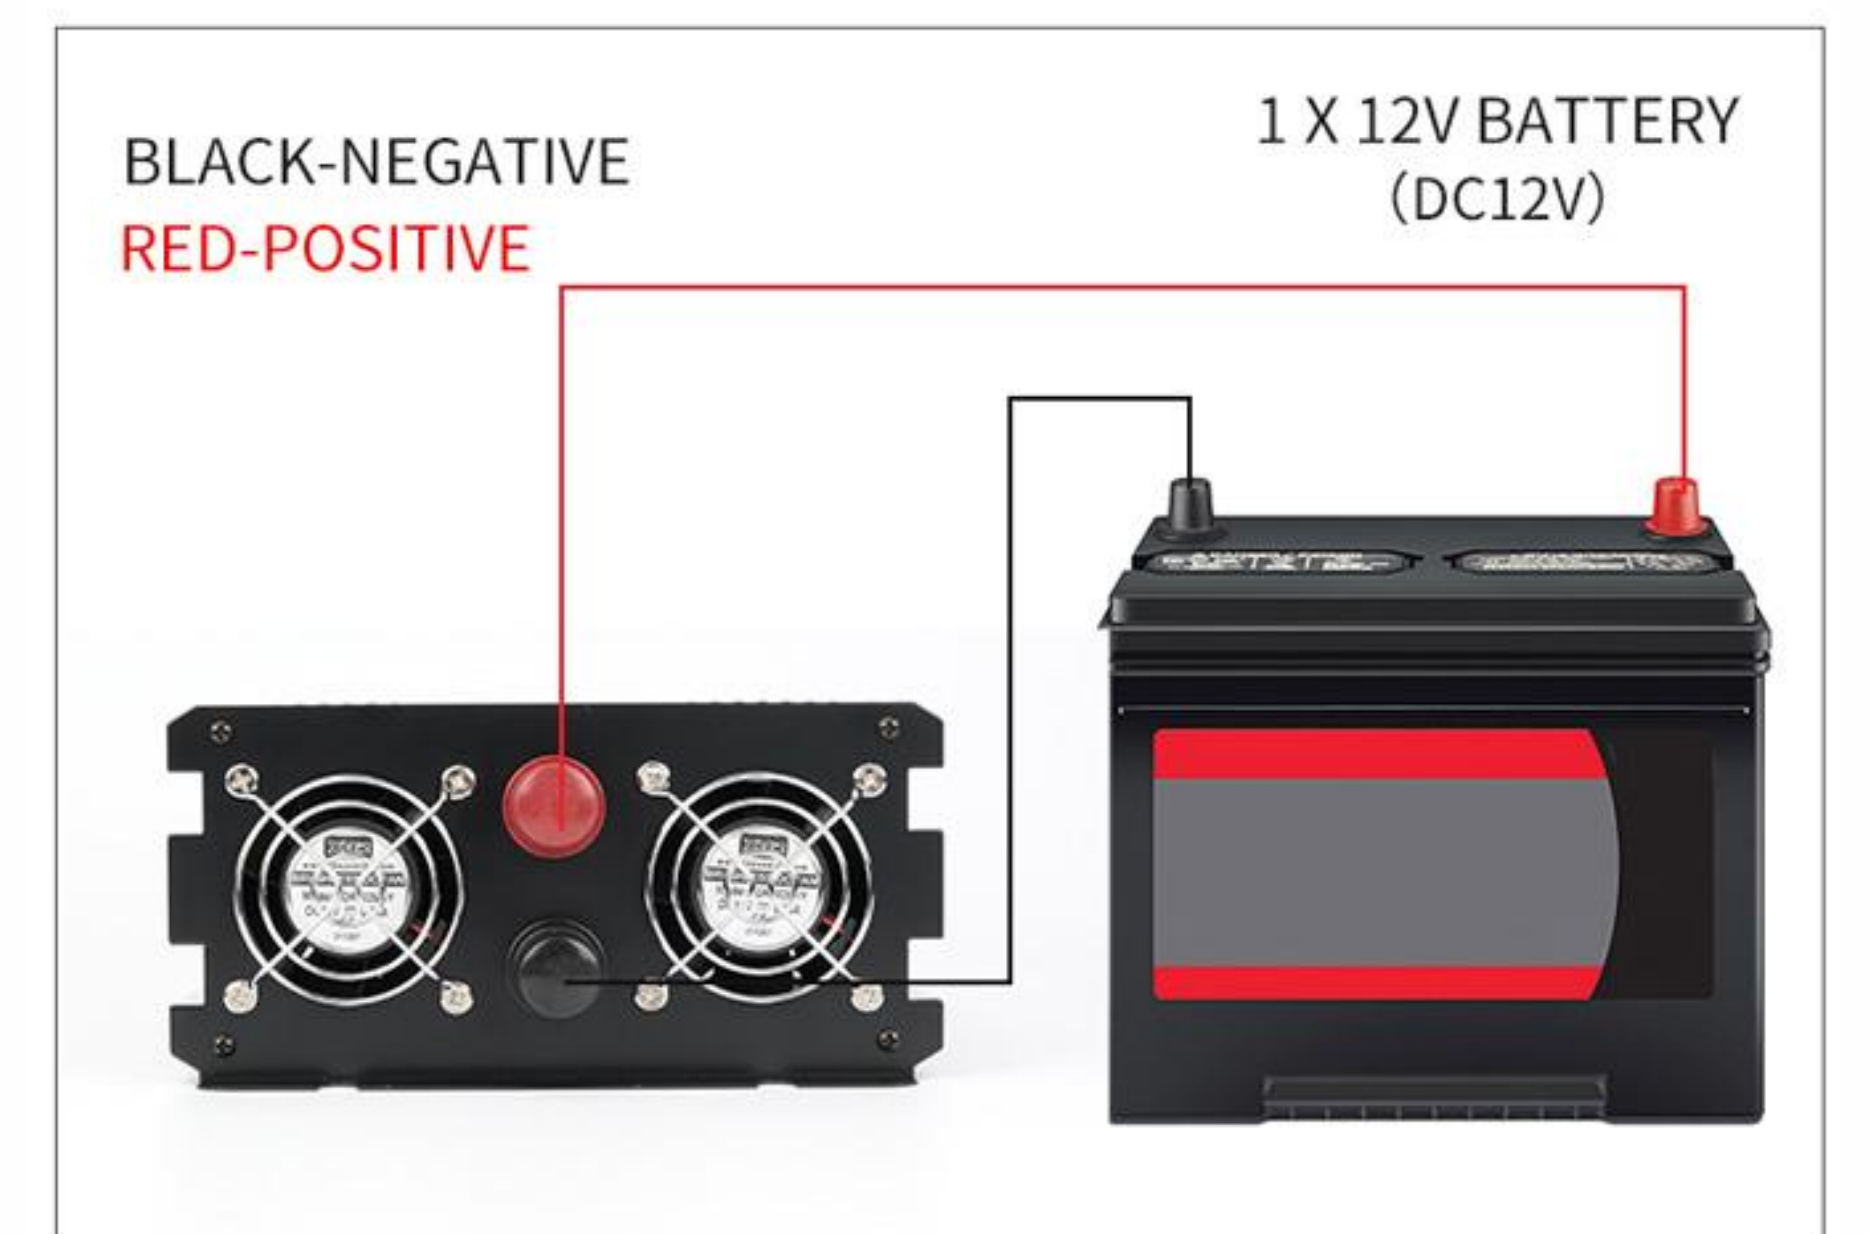

SPEC.

Model	TP1200W-12V	TP1200W-24V	TP1200W-48V
Output power	1200W		
Peak power	2400W		
Input voltage(Range)	DC12V(9-15.5V)	DC24V(18-31V)	DC48V(38-61V)
Output voltage(Single)	(100VAC/110VAC/120VAC/220VAC/230VAC/240VAC) $\pm 5\%$		
Unload current less than	$\leq 0.6A$	$\leq 0.3A$	$\leq 0.2A$
Output frequency	50Hz or 60Hz		
Output waveform	Pure sine wave		
Waveform distortion	THD $\leq 3\%$ (Pure resistive Load)		
USB	18W Fast charging		/
Max.output efficiency	88%	90%	92%
Low voltage protection	Pre-alarm (alarm off after 1 sound), LED Red light on, voltage contiously reduce and shutdown		
Over voltage protection	Pre-alarm (alarm off after 2 sounds), LED Red light on, shutdown		
Overload protection	Continuous alarm, LED Red light on, shutdown		
Over temperature protection	Pre-alarm (alarm off after 3 sounds), temprature continously rise, LED Red light on, shutdown		
Short circuit protection	Perfect protection and no damage the circuit		
Input reverse polarity protection	Fuse burn-out		
Low voltage alarm	10.5 $\pm 0.5V$	21 $\pm 0.5V$	42 $\pm 1V$
Low voltage protection	9.5 $\pm 0.5V$	19 $\pm 0.5V$	38 $\pm 1V$
Over voltage protection	15.5 $\pm 0.5V$	31 $\pm 0.5V$	61 $\pm 1V$
Low voltage recover	13 $\pm 0.5V$	24 $\pm 0.5V$	48 $\pm 1V$
Over voltage recover	14.5V $\pm 0.5V$	29V $\pm 0.5V$	58V $\pm 1V$
Working temperature	-20° - +50°		
Product Dimension(mm)	296*180*90		
Mounting Size(mm)	270*100		
Net./gross weight(kgs)	3/3.55		
Gross weight/CTN(kgs)	15.1		
Warranty	24Months		
DC Cable(mm ²)	10	6	4
Cooling method	Intelligent air cooling		

CHOOSE SOCKET



UNIVERSAL



AUSTRALIA



BRITISH



SOUTH AFRICA



AMERICAN



EUROPE



FRENCH

MORE STYTLE
CHECK WITH SALES

OTHERS